

Apt. CF-PI-AX-MB205 Rear View Camera Interface

Components



R04-MB14



POWER / CAN Cable



LVDS Cable



RVC Cable



FVC(AV1) Cable

Version Information

Model Name	CF-PI-AX-MB205
Latest Firmware Date	2014 - 10 - 16
Manual Version	Rev. 1.3
Manual Release Date	2014 - 10 - 24

Dip Switch Settings




No.1	Rear View CAM	ON(▼) / OFF(▲)	No.3	No.4	No.5	No.6	Car models
No.2	Front View CAM	ON(▼) / OFF(▲)	OFF(▲)	OFF(▲)	OFF(▲)	OFF(▲)	C-Class(W205) 8.4-inch / 960*540
No.3	Selection of car model	ON(▼) / OFF(▲)	OFF(▲)	OFF(▲)	OFF(▲)	OFF(▲)	C-Class(W205) 7-inch / 800*480
No.4			OFF(▲)	OFF(▲)	OFF(▲)	ON(▼)	
No.5							
No.6							

Setting mode



Button	Function
★ (Bookmark)	Enter into the setting menu. (Press the button 5 seconds)
Select(●)	Select the setting menu and setting values.
BACK	Back to previous menu.
Dial(▲, ▼, ◀, ▶)	Move the menu-pointer and adjust the setting values
BACK(Steering wheel)	Change the mode to FVC(AV1), when press the button 2 seconds.


Setting mode

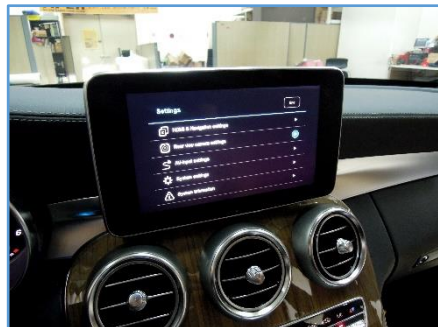

① Enter into the setting mode.



② Adjust guide lines position and ON / OFF

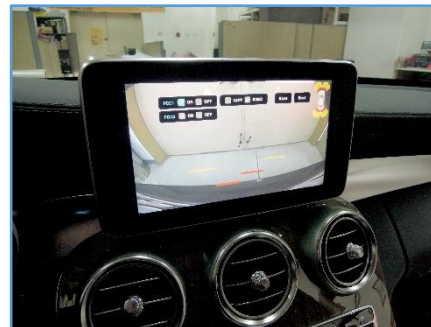



③ Adjust PDC sensors position and ON / OFF




④ Adjust values of brightness and contrast.

Apt. CF-PI-AX-MB205 Rear View Camera Interface

COMAND NTG 5.0 Main Connector - CAN wires Inform

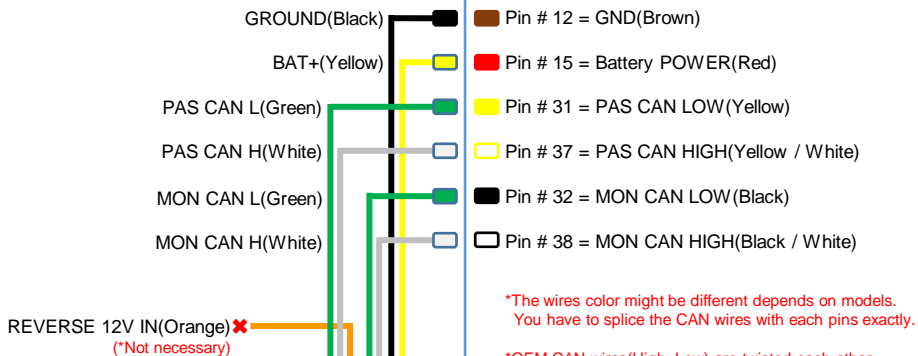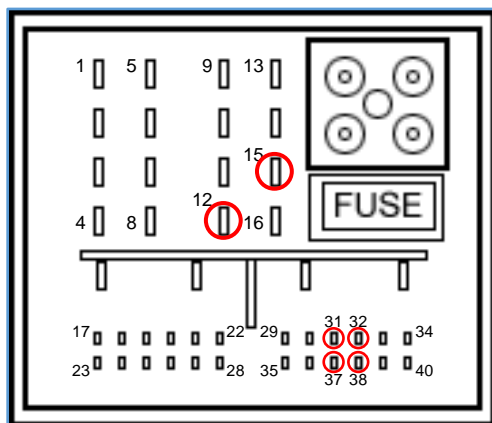

REVERSE 12V IN(Orange) ✗
(*Not necessary)

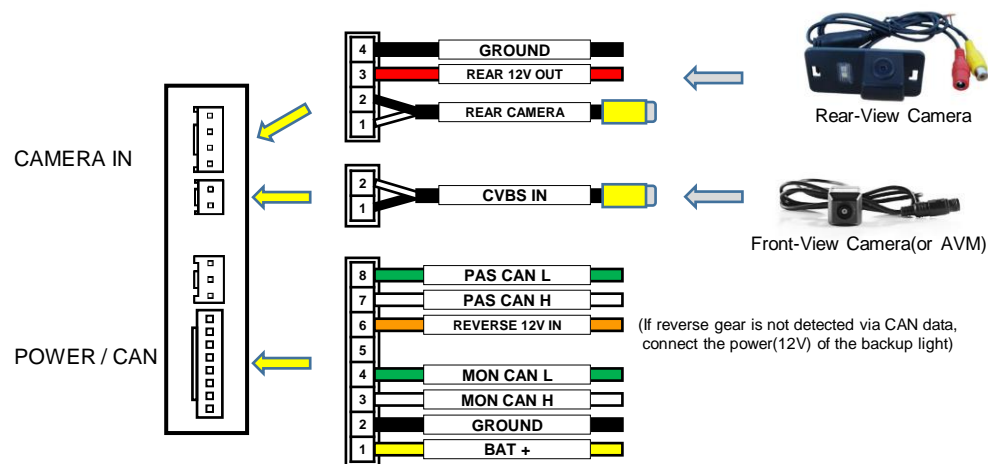

※ OEM LVDS connector should be connected to 'LVDS OUT' port.

Provided LVDS connector should be connected to 'DISP port' of Head unit instead to OEM connector.

