

**Инструкция по  
Установке и  
Эксплуатации  
(CF-V-PARK-VLV15)**

# Table of Contents

---

1. Specifications	
1.1 Main Specifications	1
1.2 Functions	2
1.3 System Diagram	3
1.4 Components	4
1.5 Exterior	5
2. Installation	
2.1 Installation Diagram	6
2.2 Installation	7
2.3 CAN wire Installation	8
3. Settings	
3.1 DIP Switch	9
3.2 Remote Control	10
3.3.1 Parking guidelines/3D PDC	11
3.3.2 PIP(picture in picture)	12
3.3.3 Factory Mode -IMAGE, PARK	13
3.3.4 Factory Mode – UTIL 1	14
3.3.5 Factory Mode – UTIL 2	16
3.3.6 Factory Mode – INFO	19
3.3.7 Factory Mode – OSD Analog RGB	20
3.3.8 Factory Mode – OSD Video	21
4. Trouble Shooting	22

# 1. Specifications

---

## 1.1 Main Specifications

1. Car Compatibility  
Volvo S60, XC60 2015 year
2. Components  
Interface\* 1EA
  
3. MULTIMEDIA INTERFACE input specification
  - 3 \* A/V input (video external input)
  - 1 \* CVBS(Rear Camera) input
  - 2 \* Analog RGB input (Navigation system, HDMI)
  - 1 \* LCD input (Car system input)
  
4. MULTIMEDIA INTERFACE output specification
  - 1 \* LCD output
  
5. Power specification
  - Input power : 8VDC ~ 18VDC
  - Consumed power : 5WATT

# 1. Specifications


---

## 1.2 Functions

1. Dynamic PAS(Parking assistance system)+3D PDC(Parking distance control)
  - moving parking line according movement of steering wheel
  - Front / Rear car distance sensor display in external mode
2. Support PIP display – showing sources at the same time (Picture in Picture)

# 1. Specifications

## 1.3 System Diagram

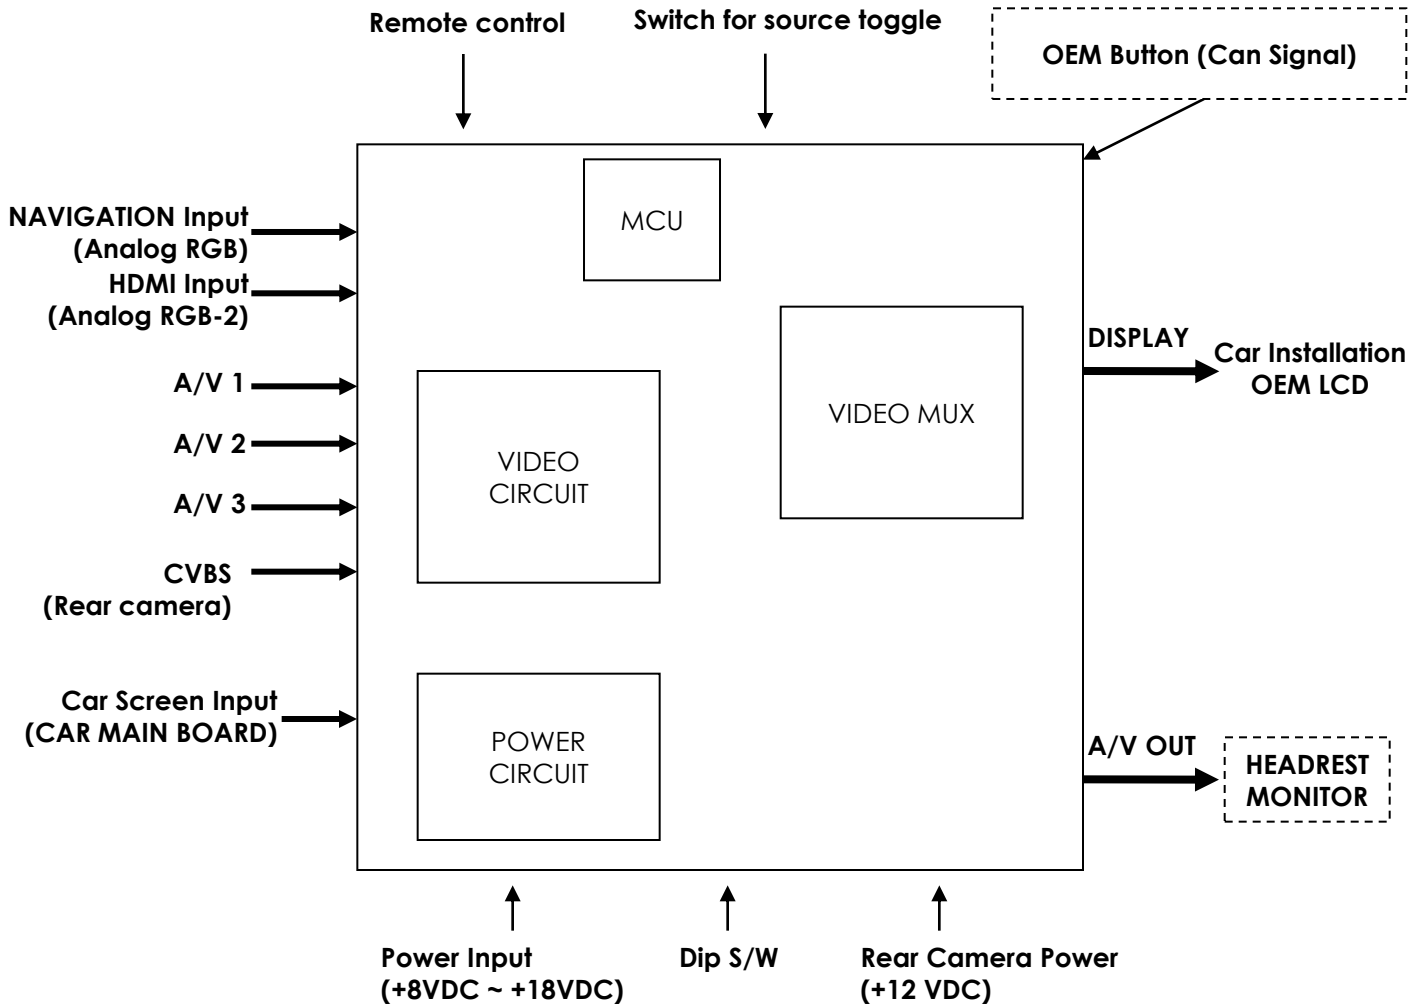

# 1. Specifications

## 1.4 Components



TOUCH IN cable \* 1ea  
(HTOUCH0009)




LVDS IN/OUT cable \* 1ea  
(HLCDCA0003)



MODE cable \* 1ea  
(HARETC0001)



IR cable \* 1ea  
(HIRCAB0002)

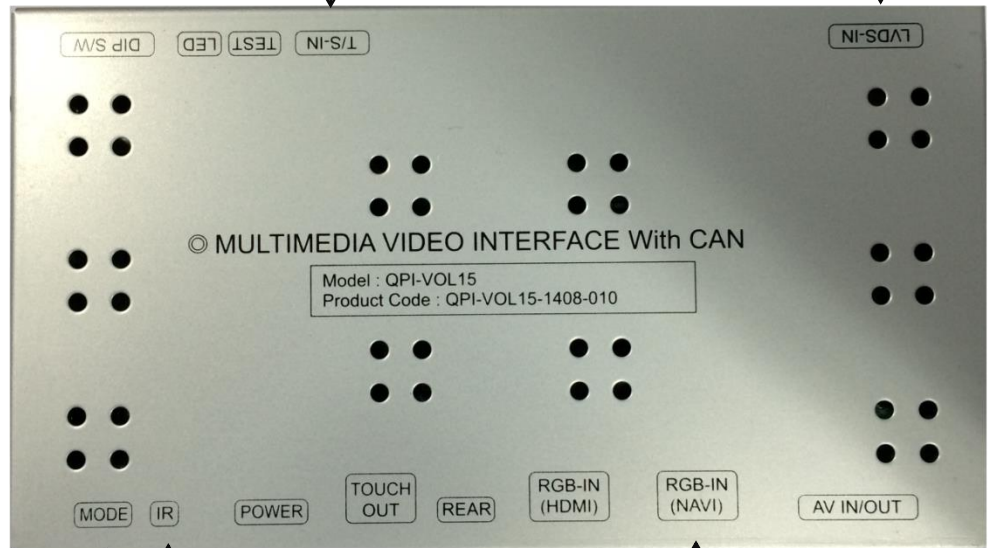

TOUCH OUT cable \* 1ea  
(HTOUCH0004)



REAR CAMERA  
POWER cable \* 1ea  
(HARETC0002)



7P POWER cable \* 1ea  
(HTOUCH0068)




RGB\_IN cable (9P) \* 1ea  
(HRGBCA0013)



AV cable \* 1ea  
(HAVCAB0002)

# 1. Specifications

## 1.5 Exterior

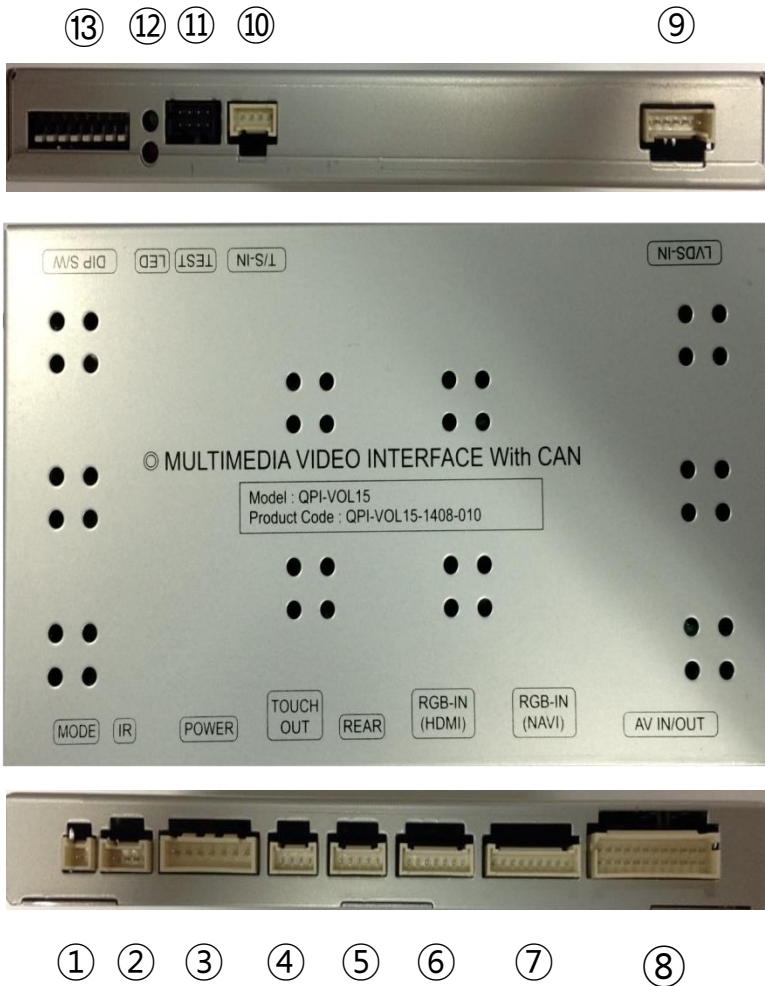


### Dimension

Width 164mm  
Length 91mm  
Height 19mm

- ① MODE
- ② IR
- ③ POWER
- ④ TOUCH OUT
- ⑤ REAR
- ⑥ RGB-IN(HDMI)
- ⑦ RGB-IN(NAVI)
- ⑧ AV/IN/OUT
- ⑨ LVDS IN
- ⑩ T/S-IN
- ⑪ TEST
- ⑫ LED
- ⑬ DIP S/W

# 2. Installation

## 2.1 Installation Diagram

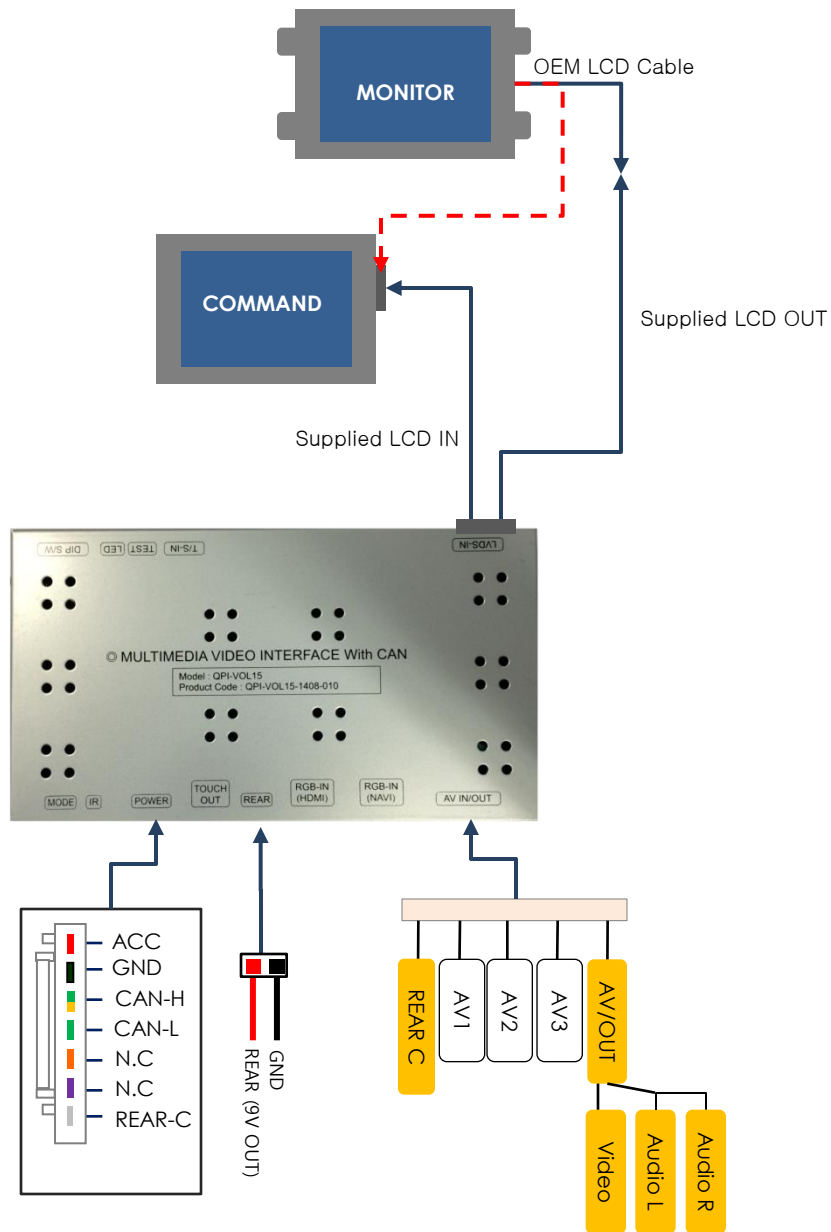

※ Please connect ACC cable to B+ cable



# 3. Settings

## 3.1 DIP Switch

- ※ Example DIP S/W usage
  - Use input mode : A/V2, A/V3
  - Use original navigation
  - External rear camera



※ ON : DOWN / OFF : UP  
 Default: #8 OFF

- ▷ DIP S/W : 1 → ON (hide INPUT MODE)
- ▷ DIP S/W : 2,3 → OFF (A/V1,2 display)
- ▷ DIP S/W : 4 → OFF (A/V3 display)
- ▷ DIP S/W : 5 → ON/OFF
- ▷ DIP S/W : 6 → ON/OFF
- ▷ DIP S/W : 7 → ON (display external rear cam)
- ▷ DIP S/W : 8 → OFF

<i>PIN</i>	<i>Function</i>	<i>Dip S/W Selection</i>
1	Displaying RGB input	ON : RGB mode skip OFF : RGB mode display
2	Displaying A/V 1	ON : A/V 1 mode skip OFF : A/V1 mode display
3	Displaying A/V 2	ON : A/V 2 mode skip OFF : A/V2 mode display
4	Displaying A/V 3	ON : A/V 3 mode skip OFF : A/V3 mode display
5,6	Select Car model	5-ON, 6-OFF : V40 5,6-OFF : S60, XC60
7	Setup of rear camera use	ON : CVBS4 OFF : MAIN
8	no use	

# 3. Settings

## 3.2 Remote Control



<i>Key</i>	<i>Function</i>
POWER	Unavailable
PIP	A/V 1~2 Mode : Remote control UI Display HDMI, A/V 3 Mode : Mode switching UI Display
MENU	Activating OSD menu
OK	Making a selection, changing image display
▲	Moving upward
▼	Moving downward
◀	Moving leftward (If you press this button 2 seconds long, you can access the factory mode.)
▶	Moving rightward (If you press this button 2 seconds long, you can reset all the data about user environment.)

# 3. Settings

## 3.3.1 Rear parking guidelines


< Rear camera full screen >



< PIP screen >



☞ Change the size of image : Press **CAM button** in Rear mode.

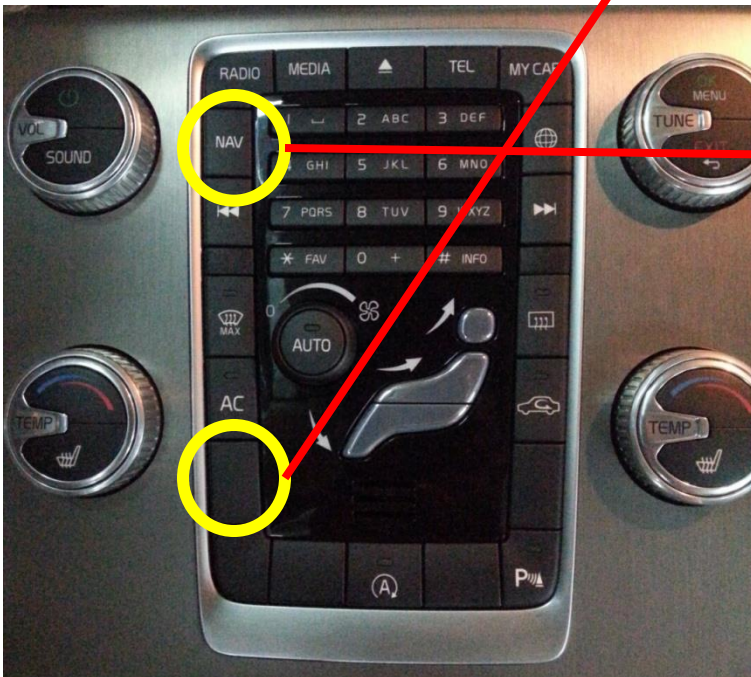

☞ **Mode switches :**

**NAV button :**

- Long Press  
(Switch to external mode)
- Short Press  
(Switch to OEM mode)

# 3. Settings

## 3.3.2 PIP(Picture in Picture)



< Before Approaching objects >



< After Approaching objects >

- PIP image will be shown as above.

**(Car without Front sensor : Not applicable)**

# 3. Settings

## 3.3.3 FACTORY MODE-IMAGE, PARK

FACTORY mode – Press ◀ button 2 seconds long on the remote control.



### □ IMAGE

Adjust navigation position and size

H-POSITION : Move display horizontally

V-POSITION : Move display vertically

### □ PARK

PAS TYPE : Selecting Type of parking guide line

- NOT USED : Not use Parking guide line
- PAS ON : Selecting Dynamic Parking guide line
- PAS OFF : Selecting fixed Parking guide line

PAS SETUP : Adjusting the position of the parking guide line

REAR TYPE : Choose rear camera recognition

\* LAMP - Detecting the rear view camera via rear lamp (Installer must connect "Rear-C" cable of the power cable to the rear lamp of the car.)

\*CAN - Detecting the rear view camera by CAN signal (Installer must connect "CAN" cable of the power cable to the "CAN" cable of the car.)

SAFE ENABLE : If your car is connected with CAN cable and it is in "ON" state, you can NOT watch DVD or A/V except original image or navigation while driving. At that time the screen get back to the main (default : OFF)

RADAR ENABLE : When set the gear to "R", Display PDC

# 3. Settings

## 3.3.4 FACTORY MODE-UTIL1

FACTORY mode – Press ◀ button 2 seconds long on the remote control.

▪ Setup for navigation



▪ Setup for car model



### UTIL1 – NAVI MODEL

Definition of the navigation resolution

DEAFULT  
NAV-506TP  
MYVI  
WP9200  
HDMI  
GI-8000N 3D  
GI-5000A  
I-ONE  
KD-900  
PAPAGO  
LS-901

### UTIL1 - CAR MODEL

Selecting model of the car

Volvo

**\* Go into FACTORY/ IMAGE (as shown right) and adjust the position and the size of the navigation after setting the definition of the navigation**

# 3. Settings

## 3.3.4 FACTORY MODE-UTIL1

FACTORY mode – Press ◀ button 2 seconds long on the remote control.



### UTIL1 – AVOUT SELECT

Selecting background sound  
After  
returning navigation or original  
mode

DEFAULT : Selecting AV sound  
just before changing  
navigation or original mode  
from the AV mode

AV 1~3 : Sound of the selected  
AV source 1~3



### UTIL1 – HDMI SKIP

Selecting whether to use  
HDMI function or not

ON(Not use) / OFF(use)





### UTIL1 - FACTORY RESET

FACTORY MODE RESET

# 3. Settings

## 3.3.5 FACTORY MODE-UTIL2

FACTORY mode – Press ◀ button 2 seconds long on the remote control.

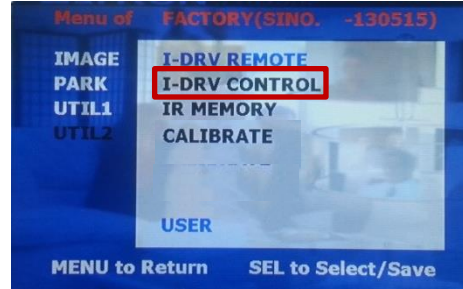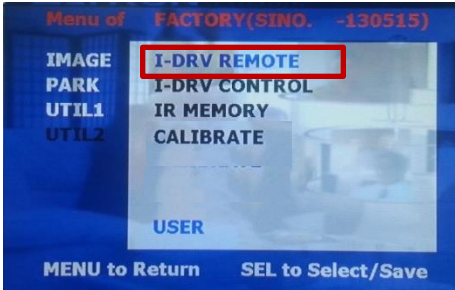

### UTIL2 - I\_DRV REMOTE

Choose DTV and DVD model to be control I\_DRV function


LI-1DISC

NEC-6DISC

USER(when using IR MEMORY)

•Select DVD model: Setting on AV1 Mode

•Select DTV model : Setting on A/V2 mode

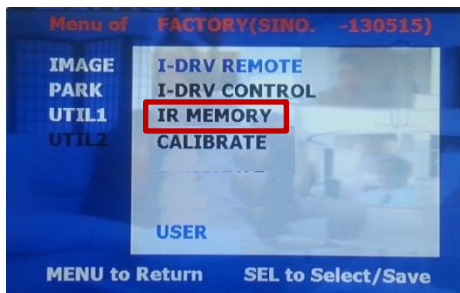

### UTIL2 – IR MEMORY

To register DVD, DTV remote control, the remote control value must be registered and can be control with Jog shuttle DVD(A/V1), DTV(A/V2)

※ To use this function, in UTIL2-I\_DRV REMOTE select USER mode


### UTIL2 - I\_DRV CONTROL

Selecting whether to use I\_DRV function or not

ON / OFF

A/V1 : Control DVD Remote control UI

A/V2 : Control DTV Remote control UI

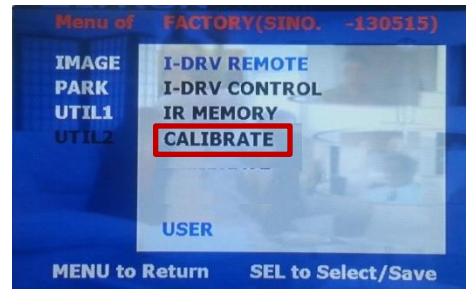

### UTIL2 – CALIBRATE

Touch Calibration

YES / NO




# 3. Settings

## 3.3.5 FACTORY MODE-UTIL2

FACTORY mode – Press ◀ button 2 seconds long on the remote control.

### □ UTIL2 – IR MEMORY

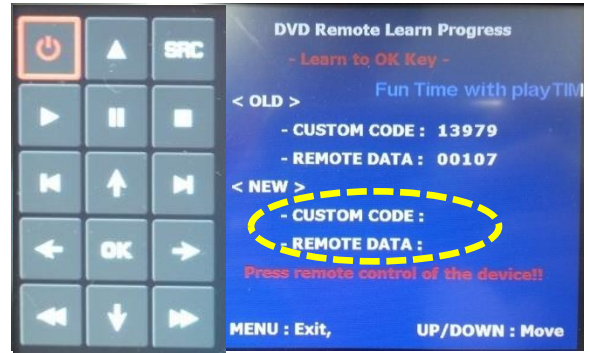

- ① First of all, press ◀ button on remote controller 2 seconds long or press UP→DOWN→UP→MENU button in order to access Factory mode. Choose IR MEMORY on UTIL2.

In IR MEMORY, you can choose AV source of DTV and DVD you want to use.

- ② Picture above shows DVD remote control button value input, select menu you want to save. (To register DVD remote control button value, select IR MEMORY – DTV and follow below instructions.

Example)

- a. After select OK button on OSD menu, press intended I-Drive button
- b. Indicated part above will flicker, and press POWER on DVD remote control.  
(continue to next page)

### What is IR-MEMORY Mode?


Is to allow Jog shuttle and touch screen to control other DVD or DTV (besides the existing,; for example : SANYO, NECVOX) by register remote control value.

# 3. Settings

## 3.3.5 FACTORY MODE-UTIL2

FACTORY mode – Press ◀ button 2 seconds long on the remote control.

### □ UTIL2 – IR MEMORY

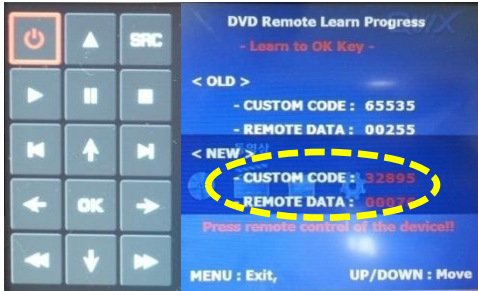

Instruction> continued...

c. The values that you registered will appear as green text in the marked area on pressing the button. And the values will be saved automatically.

d. Register remain buttons' value in OSD menu like the above-mentioned.

- ③ After register, select “SRC” button in OSD menu. Then you can see confirmation window as shown above. At the moment, (If data is saved, DVD TYPE and DTV TYPE will be changed to “USER” automatically.)


If you see “SUCCESS” on screen, the data is saved clearly and you can control DVD via touch screen. BUT, you MUST change the option in FACTORY-UTIL2-I\_DRV REMOTE to “USER”.

※ When touch the screen or Select PIP button in remote controller, you can control DVD, DTV using remote control UI via touch screen or Jog shuttle

※ DVD(A/V1), DTV(A/V2) mode, Can see remote control UI

HDMI, A/V3 mode, Can see mode switching UI

- If you want to see mode switching UI in DVD, DTV mode, Select “SRC” button

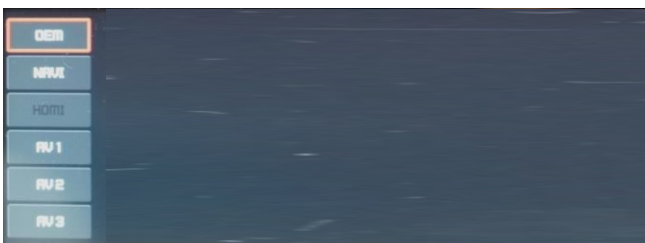


# 3. Settings

---

## 3.3.6 FACTORY MODE-INFO

FACTORY mode – Press ◀ button 2 seconds long on the remote control.

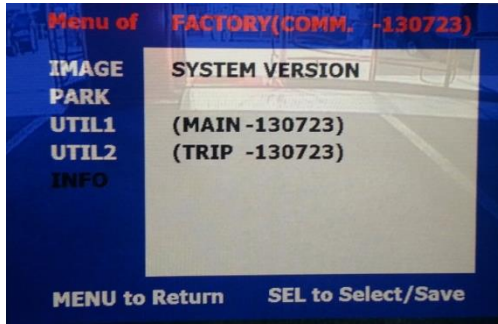

---

### INFO

Check main version and Trip version

# 3. Settings

## 3.3.7 OSD (On Screen Display) / Analog RGB Mode



### □ IMAGE

- \* BRIGHTNESS
- \* CONTRAST
- \* SHARPNESS



### □ OSD

- \*LANGUAGE : Set OSD language (only support English and Chinese)
- \* TRANS : Adjust OSD transparency
- \*H-POSITION : Move OSD horizontally
- \* V-POSITION : Move OSD vertically



### □ UTIL

- \* FACTORY RESET  
: Factory reset only for OSD function  
(unable reset video position)

# 3. Settings

## 3.3.8 OSD (On Screen Display) / Video Mode




### □ IMAGE

- \* BRIGHTNESS
- \* CONTRAST
- \* SATURATION
- \* HUE
- \* SHARPNESS

### □ OSD

- \* LANGUAGE : Set OSD language (only support English and Chinese)
- \* TRANS : Adjust OSD transparency
- \* H\_POSITION : Move OSD horizontally
- \* V\_POSITION : Move OSD vertically

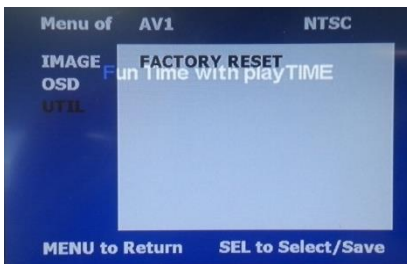

### □ UTIL

- \* FACTORY RESET  
: Factory reset only for OSD function (unable reset video position)

# 4. Trouble Shooting

---

## **Q. I cannot change mode**

- A. Check connection of Ground cable and IR Cable.  
Check LED lamp is on, if not check connection of POWER cable.

## **Q. All I got on the screen is black.**

- A. .Check second LED lamp of the interface is on, if not, check A/V sources connected are working well.  
(Second lamp indicates AV sources connected works well.) Check interface connection has been done well.

## **Q. Displayed image color is not proper (too dark or unsuitable color)**

- A. Try to select "INITIAL" in OSD menu, if it does not work, inform to manufacturer.

## **Q. I cannot watch the rear camera on the screen**

- A. Set the DIP switch #7 as state "ON".

## **Q. Set mode not appear**

- A. Check DIP Switch.

## **Q. OEM image is not displayed.**

- A. Check interface's LCD In/Out cable connection. If the status keeps on, inform to manufacturer.

## **Q. Screen only displays white color.**

- A. Check LCD out cable is connected well, if this status keeps, inform to manufacturer.

## **Q. Show PIP function via handle button, and original screen appear half only.**

- A. This is not because of faulty interface, please check original monitor split function settings.

## **Q. After connect CAN cable, set gear "R", video doesn't appear.**

- A. Go to "FACTORY MODE" and check "UTIL-Rear Select". Change "LAMP" settings to "CAN" with remote control.  
※ LAMP : In case of connecting "Rear-C" wire of Power Cable to Rear Lamp in vehicle.  
It may not work on a camera with 12V